




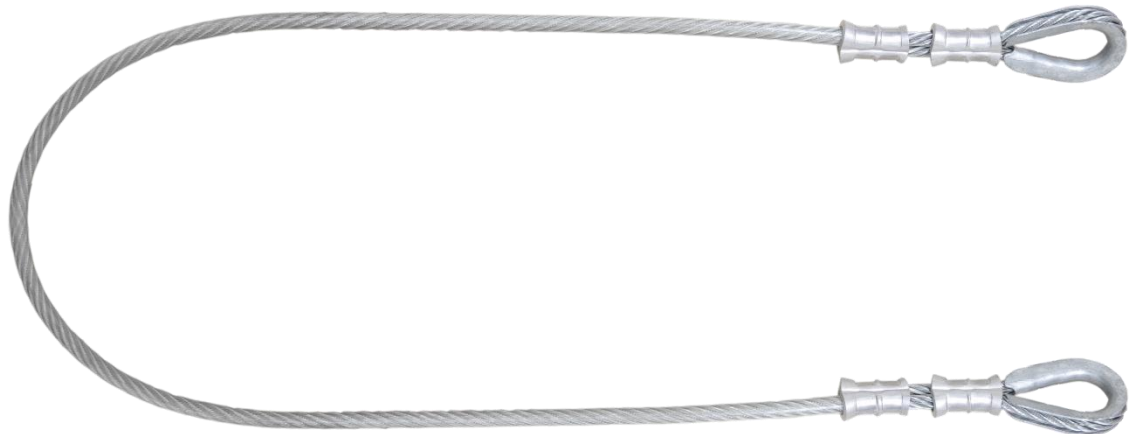

FA 60 0006 10/20:

PVC +  STEEL

FA 60 006 10S/20S:

PVC +  INOX

HS CODE
76169990
CARTON SIZE / PCS.
FA 60 006 10/S : 40 x 40 x 24 cm / 25
FA 60 006 20/S : 40 x 40 x 24 cm / 20
FA 60 006 XX: AET (UE) N°2777/11681-01/E00-00
FA 60 006 XXS: AET (UE) N°2777/10792-02/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 006 10 FA 60 006 20 FA 60 006 10S FA 60 006 20S
CE	EN 795:2012 Type B
	x1
LG.	1.0 m 2.0 m 1.0 m 2.0 m
MAT.	PVC /  STEEL Ø 8.0 mm PVC /  INOX Ø 8.0 mm
R (kN) / MBS (kN)	12 kN / 25 kN
	0.56 kg 0.80 kg 0.46 kg 0.74 kg



Nombre d'utilisateurs
 Number of users
Cantidad de usuarios
 Quantità di utilizzatori
Anzahl der Benutzer

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
 Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
 Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)